



TECHNICAL ROPE GUIDE

YACHTROPES.CO.UK

ROPES TESTED TO THE LIMIT

GENTOO ARE DELIGHTED WITH THE LONGEVITY AND PERFORMANCE OF THE LINES ON BOARD, IN EXTREME CONDITIONS THEY HAVE EXCELLED.

JAMES HARAYDA
GENTOO SKIPPER

ABOUT

Kingfisher Yacht Ropes was established as a brand in 2002 when DSM Group added yacht ropes to its extensive range of ropes and rope-related products. Kingfisher has become one of the most recognisable brands of yacht ropes in the sailing industry. We distribute our range of products throughout the world to many chandlers, riggers, boat builders and sailmakers.

We have invested a great deal of time into testing and developing new products, and spend many hours on research to ensure we are continually optimising our range.

Please visit our website www.yachtropes.co.uk for the latest news on products and upcoming events.

CONTENTS

CRUISING ROPES	4-7
RIGGING ROPES	8-11
TYLASKA	12
GENERAL PURPOSE	13
EVOLUTION DINGHY	14-19
MOORING & ANCHORING	20-23
SPLICING EQUIPMENT	24
SPLICED ROPES	25
LOOP® PRODUCTS	26-27
EXTRAS	28-29
WEBBING STRAPS	30
ECO CYCLE & SUPERYACHTS	31

PRODUCT KEY



ROPES MADE WITH
DYNEEMA® FIBRE



ROPE
DIAMETER



PART OF OUR
ECO-CYCLE RANGE



CUT LENGTHS
AVAILABLE



NEW AND
IMPROVED



20%
STRETCH PERCENTAGE
AT 20% OF BREAKLOAD




COLOUR OPTIONS
AVAILABLE ON REQUEST

Where performance is important but not as critical as on a racing boat, durability, handling & cost-effectiveness are essential.

KINGFISHER CAN RECOMMEND THE BEST CHOICE OF CRUISING ROPE FOR EVERY APPLICATION AND EVERY POCKET.

Sales. +44 (0) 1924 497845
Email. sales@dsm-group.co.uk

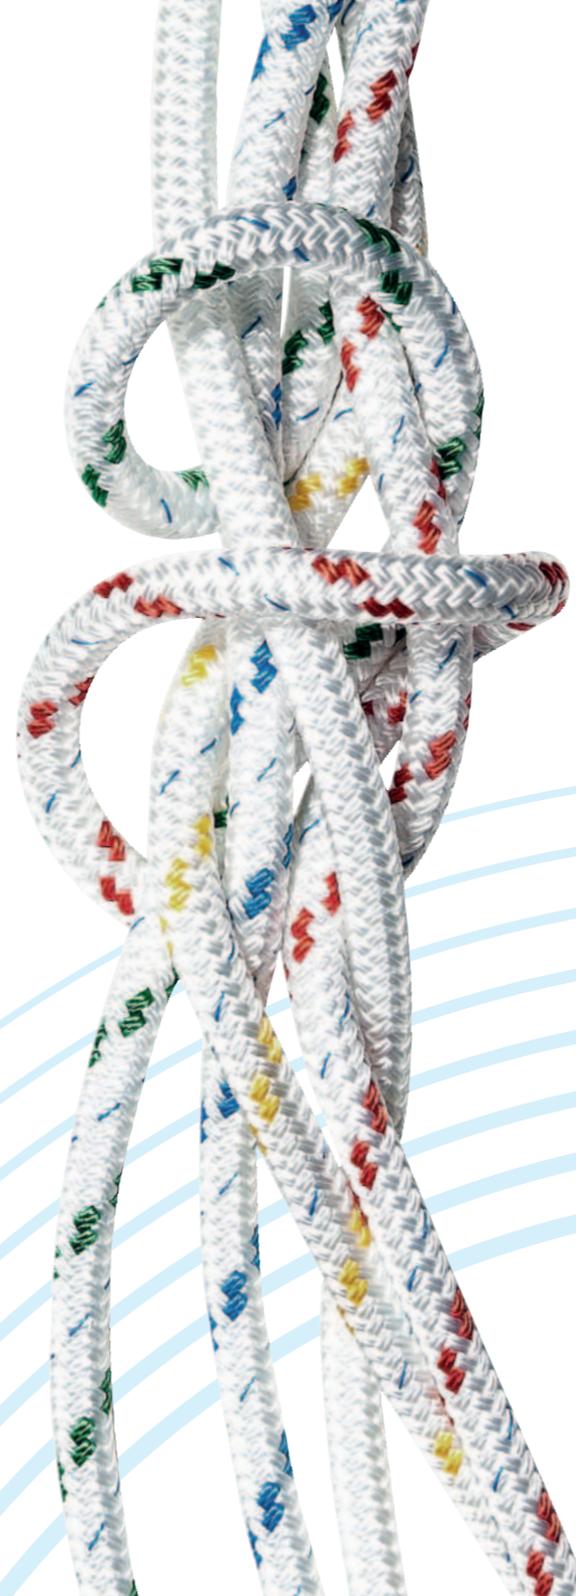


BRAID ON BRAID POLYESTER

Braid on Braid Polyester is an ideal cruising rope consisting of a low-stretch braided Polyester core, with an abrasion-resistant, braided Polyester cover. Our Braid on Braid Polyester rope is heat set under load to reduce stretch and is the ideal choice for sheets, halyards, control lines and many general-purpose applications. It is easy on the hands and simple to splice.

WHITES

Our classic colour range of Braid on Braid Polyesters are available in solid white and white with coloured flecks.

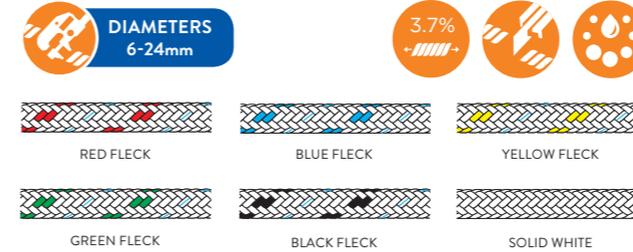

SOLIDS

Our range of solid colour Polyester Braid on Braids now includes green, silver and hemp colour.




MELANGES

Melange Braid on Braids are a mottled mix of Polyester yarns to provide a modern colour twist for our standard Braid on Braid cruising ropes.



DYNEEMA® CRUISE

Dyneema® Cruise ropes are made with a HT Polyester braided cover, and a braided Dyneema® core, all lines have intermediate covers to reduce core / cover slippage. This rope has been designed as an upgrade to our 100% Polyester ropes and is lighter with higher strength and lower stretch.

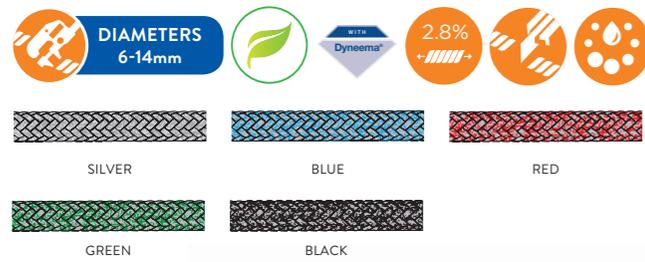

MATT POLYESTER

Matt Polyester is a soft Polyester braid on braid with a high grip staple Polyester cover. It is ideal for sheets, control lines and classic rigging.



KINGBRAID

Kingbraid has a 3 strand twisted Polyester core and 32 plait Polyester cover. It is lower stretch, stronger and harder wearing than standard Polyester braid on braid. It is ideal for halyards, sheets, control lines and most on board applications.



TECHNICAL SPECIFICATION



All our ropes are tested to the limit

On the water, in many of the world's greatest yacht races, and off the water, at the factory, our ropes are tested to destruction. We always publish minimum spliced breaking loads, ensuring our results are not only relevant to the user, but achievable.

Diameter (mm)	Minimum Spliced Break Loads (kg)			
	Braid on Braid Polyester	Dyneema® Cruise	Kingbraid	Matt Polyester
4	-	-	-	250
5	-	-	-	380
6	820	1100	930	590
8	1300	2100	1800	1000
10	2400	3400	2700	1800
12	3200	5200	4100	2500
14	4500	6700	5100	3000
16	5900	-	-	3700
18	7600	-	-	-
20	8900	-	-	-
24	10,500	-	-	-

LOAD-ELONGATION CURVE

Elongation is based on figures taken from tests across the diameter range, to produce an average figure.

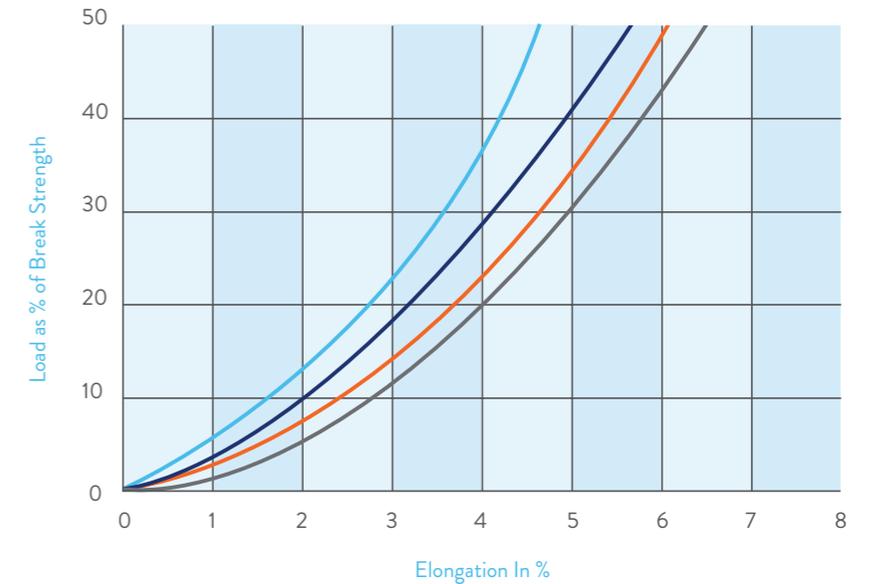


Kingfisher's Rigging range is made using the latest technologies and fibres. These high performance ropes for racing yachts are low in stretch and high in strength.

OUR RIGGING RANGE IS AVAILABLE FROM OUR PREMIUM RIGGING PARTNERS AROUND THE WORLD.

Sales. +44 (0) 1924 497845

Email. sales@dsm-group.co.uk

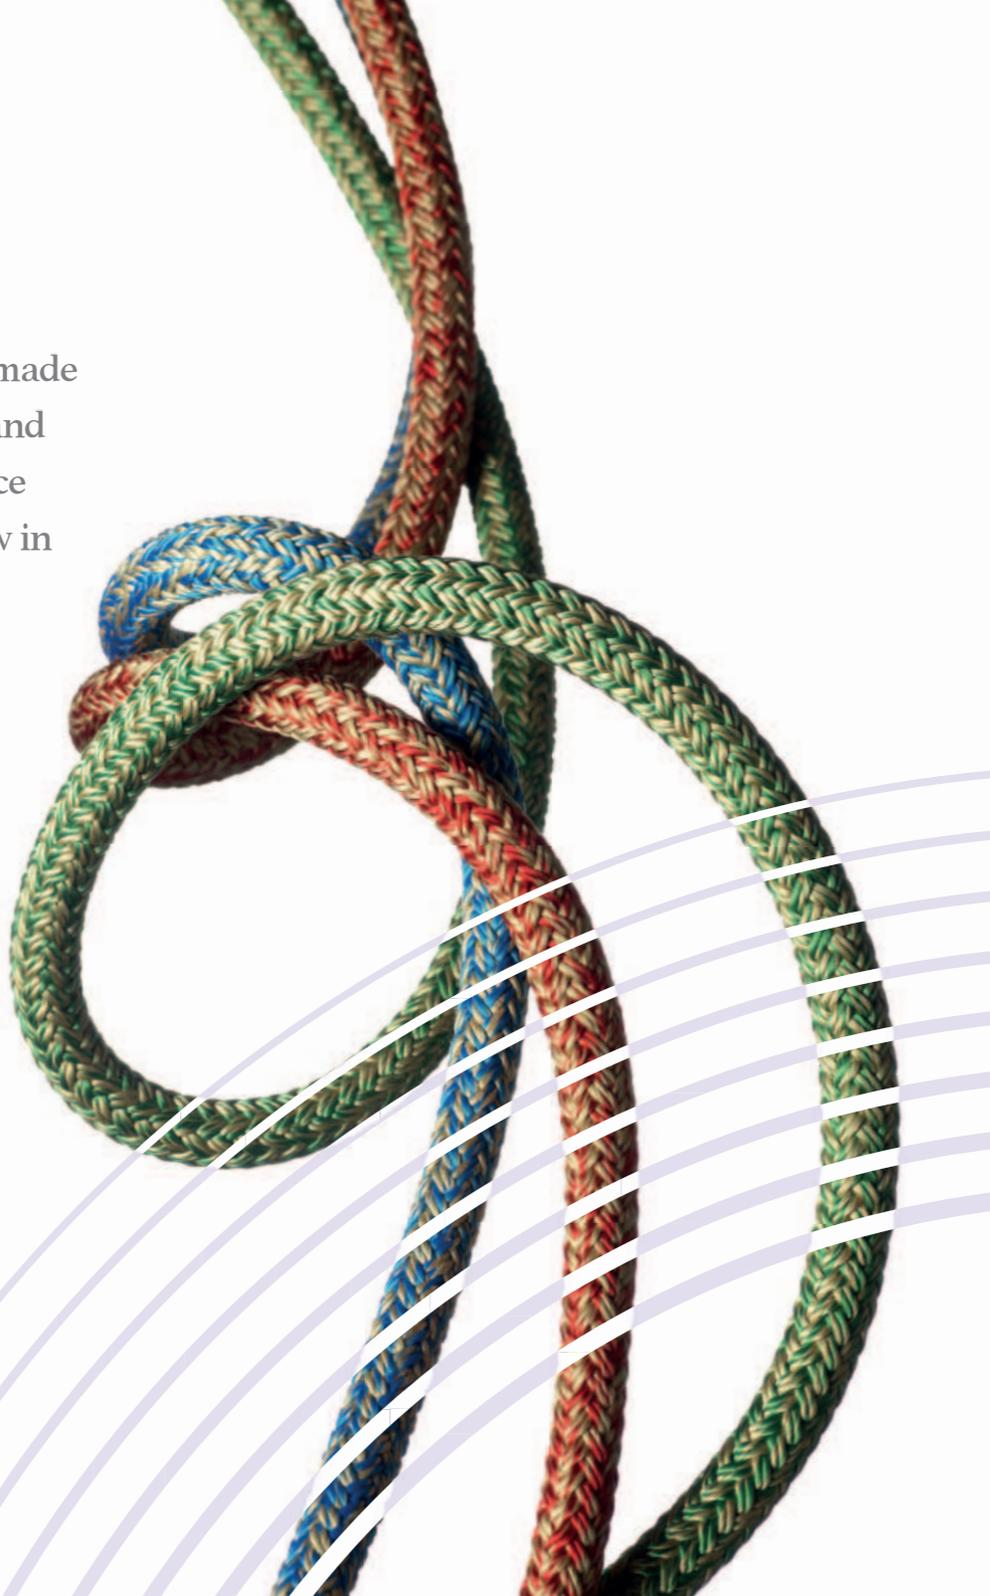

RACING DYNEEMA®

Racing Dyneema® products have two different options on cores, the most common of which is our Dyneema® SK78 version. This 12strand coated core is low-stretch, extremely strong and (with the exception our Pro Halyard product) is available with all cover options. Racing Dyneema® 99 Pro Halyard has an upgraded stronger Dyneema® SK99 core to provide more extreme performance for Halyards. Our Racing Dyneema® products are available as a special order with our latest Dyneema® SK99 core.

RACING DYNEEMA® 78 MELANGE

Racing Dyneema® 78 melange covers are still made using HT Polyester fibres, but with fewer plaits than the standard Racing Dyneema® 78 product making it easier to splice.

DIAMETERS 6-16mm

WHITE/BLACK	BLUE/BLACK	RED/BLACK
YELLOW/BLACK	ORANGE/BLACK	PINK/BLACK
GREEN/BLACK	SILVER/WHITE	DARK GREY/BLACK
WHITE	CLASSIC	

RACING DYNEEMA® 78 RUNNER

Racing Dyneema® 78 Runner has a Dyneema® SK78 12 strand coated core with a braided Kevlar® / Technora® / Polyester melange cover. This specially designed cover has been developed in conjunction with our rigging partners and is ideal for runner tails and high load sheets, especially where heat resistance and sheet control are important.

DIAMETERS 8-14mm

RED/NATURAL	BLUE/NATURAL	BLACK/NATURAL
-------------	--------------	---------------

RACING DYNEEMA® 78 PRO TECH

Racing Dyneema® 78 Pro Tech has a Dyneema® SK78 12 strand coated core, and a braided Technora® / Polyester melange style cover. This technical cover has been designed to be used for high load sheets on racing yachts and has excellent heat and abrasion resistance.

DIAMETERS 6-16mm

RED	BLUE	GREEN
SILVER	NEON YELLOW	ORANGE
DARK GREY	RED/NATURAL	BLUE/NATURAL
GREEN/NATURAL		

RACING DYNEEMA® 99 PRO TECH

Our Racing Dyneema® 99 Pro Tech has the same abrasion resistant Technora®/Polyester braided cover as the standard Pro Tech, but has a lower stretch, stronger Dyneema® SK99 core. Despite the name, this product is an excellent all-rounder and is the go-to line for Halyards and Sheets on many race boats.

DIAMETERS 6-12mm

Many colour options are available, please enquire for our current stock availability.

RIG12

Rig12 is a 12 strand Dyneema® SK78 single braid with PU coating for improved protection against abrasion and the elements. This low-stretch line is very easy to splice and is ideal for halyards, control lines, lashings and strops. Dyneema® Max DM20 and Dyneema® SK99 versions are also available on request.



RIG12+

Rig12+ is a heat set and pre-stretched 12 strand Dyneema® SK78 single braid with PU coating for improved protection against abrasion and the elements. This very low-stretch line is pre-stretched and heat set to produce a stronger, lower stretch product. Rig12+ is easy to splice and is ideal for halyards, control lines, lashings and strops. Dyneema® Max DM20 and Dyneema® SK99 versions are also available on request.



TAPER STEEL

Our latest product designed for Club Racers and Cruising boats, who are looking for an upgrade from Polyester or Dyneema® Cruise lines. Taper Steel has a braided HT Polyester cover with a Uhmpe 12strand colour matched coated core. The rope is extremely low-stretch and high strength, and the 12 strand coated core is ideal for any tapered lines. Taper Steel is an excellent value product that sits between our Dyneema® Cruise and Racing Dyneema® 78 range.




DSK ULTRA

DSK Ultra is a premium pre stretched Dyneema® single braid with optimal construction to provide the lowest stretch with the highest strength. We stock DSK99 and DSK78 ultra in many diameters, our standard stock colour is Grey. Other colours are available to order, including a special uncoated DSK99 Ultra in white, which combined with our range of Dyneema® chafe covers is excellent for making high load loops.



DYNEEMA® COVERS XXS, XS, S, M, L, XL

The covers have been developed to provide extremely high resistance to abrasion on chafe points and are ideal protection for soft eye splices on our Racing Dyneema® 78 range of products. A soft eye splice with a Dyneema® cover protection is the most efficient splice for both time and overall performance. Kingfisher recommend this type of protected splice on all our Racing Dyneema® 78 lines.

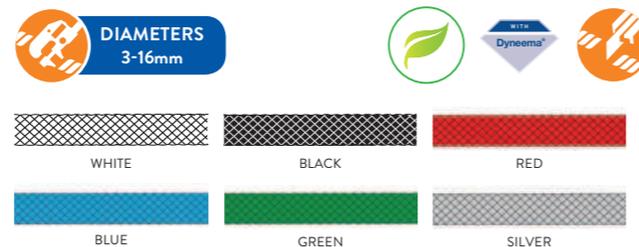

FURLER LITE

Furler Lite has been designed to be used for endless furling lines, the ropes construction allows for easy endless splicing with no diameter increase. Furler Lite has a braided black Technora® and Polyester cover with a sacrificial Polypropylene braided core, the covers construction provides excellent heat and abrasion resistance.



TECHNICAL SPECIFICATION



All our ropes are tested to the limit.

On the water; in many of the world's greatest yacht races; and off the water, at the factory, where ropes are tested to destruction. We always publish minimum spliced breaking loads as the only loads that are achievable by, and relevant to, the user.

Diameter (mm)	Minimum Spliced Break Loads (kg)						
	RD78	RD99	Rig 12	Rig 12+	78 Ultra	99 Ultra	Taper Steel
2	-	-	-	-	499	591	-
3	-	-	900	1200	1498	1774	-
4	-	-	1400	1900	2498	2957	-
5	-	-	2400	3000	3518	4180	-
6	-	-	3200	3800	4517	5405	-
7	-	-	-	-	6985	8360	-
8	3570	4150	5600	7500	8463	10,044	3100
9	-	-	-	-	9819	12,542	-
10	5250	6050	8250	10,000	13,000	15,295	4900
12	7640	8800	12,000	17,600	16,450	19,500	7050
14	10,150	-	16,750	20,200	22,800	26,600	-
16	12,950	-	19,150	25,550	27,400	31,900	-

LOAD-ELONGATION CURVE

Elongation is based on figures taken from tests across the diameter range, to produce an average figure.

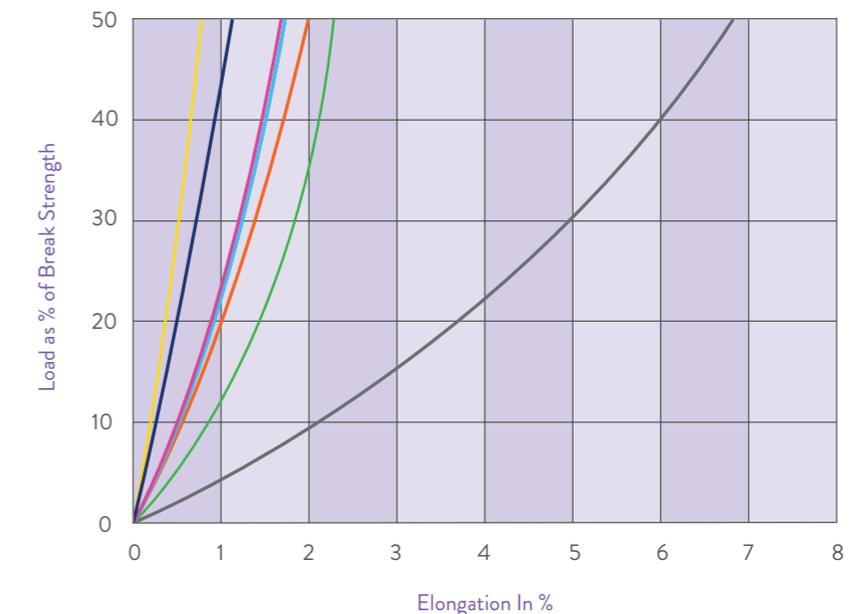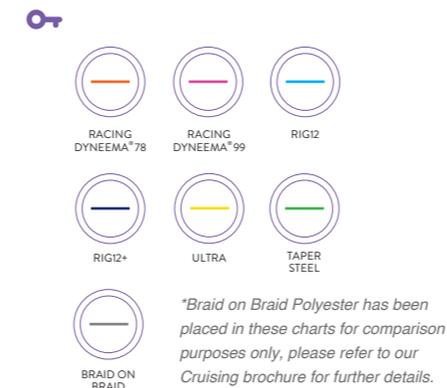

Tylaska PRODUCTS

Tylaska Marine & Aerospace is the premium manufacturer of highly finished specialty hardware used in the marine, industrial and aerospace fields. Kingfisher Yacht Ropes stock a large range of Tylaska fittings; please see some examples below.

T SERIES SHACKLES



LIGHT AIR SHACKLE



DOG BONES



HALYARD SHACKLES



CR SHACKLES




J LOCK SHACKLES



GENERAL PURPOSE

SHOCKCORD

Our shockcords have a braided cover and a natural rubber core. The ropes are made to have 100% extension, have good abrasion resistance and are used for many applications.

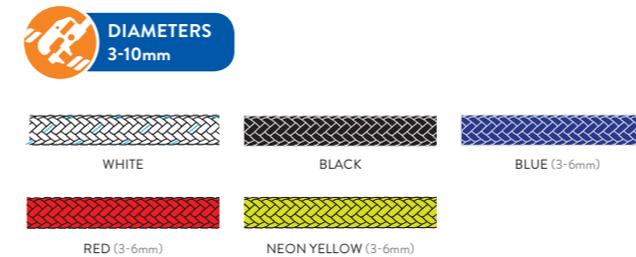


SHOCKGUARD

Shockguard is a premium shockcord with a braided cover made from 100% Dyneema® fibres which provides the ultimate abrasion resistance. The Dyneema® cover produces less friction than a conventional shockcord which provides a more even stretch when used in purchase systems on racing dinghies.




3 STRAND PRE-SHRUNK POLYESTER

3 strand pre-shrunk Polyester is used by many sail makers as a bolt rope. The rope is pre-shrunk using a special process so that it remains the same length when wet.




8 PLAIT STANDARD POLYESTER

8 plait standard Polyester is an ideal mouse line and general purpose rope.

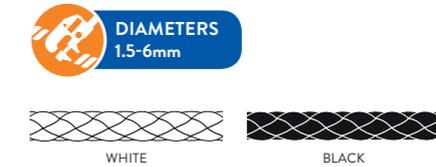

FLOATLINE

Floatline is single 8 plait braided multi-filament Polypropylene rope with no core. This rope is made in bright colours for high visibility, floats and is an ideal safety rope.

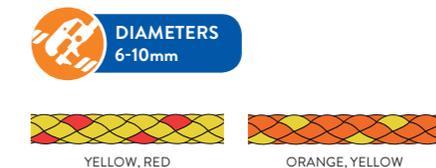

8 PLAIT MULTI-FILAMENT POLYPROPYLENE

8 Plait Multi-Filament Polypropylene single braids are a good low cost colourful braided floating line, ideal for many applications on board.



The Evolution Dinghy range of ropes has been designed in conjunction with some of the leading dinghy manufacturers, to provide extreme performance.


THE RANGE HAS A LARGE CHOICE OF SPECIALIST DINGHY ROPES TO SUIT EVERY APPLICATION AND POCKET.

Sales. +44 (0) 1924 497845
Email. sales@dsm-group.co.uk




EVOLUTION RACE 78 - MELANGES

Evolution race 78 has a high performance Dyneema® SK78 12 strand coated core that is high strength, low-stretch and low creep. It has a hard wearing braided Polyester cover and is easy to splice.

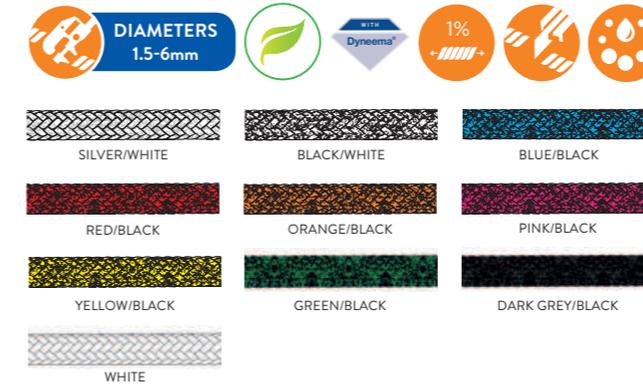

EVOLUTION RACE 78 - PROTECH

Evolution Race 78 Protech, has the same low stretch Dyneema® SK78 core as our standard product but the cover is upgraded with a combination of Technora and Polyester fibres, providing the ultimate performance. This new cover is extremely strong and has excellent abrasion resistance.

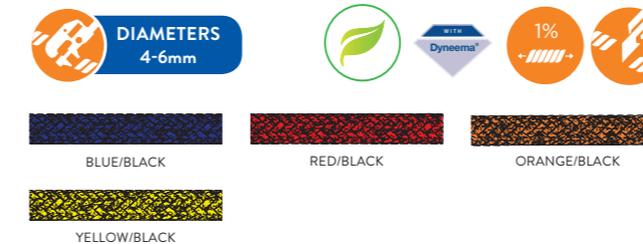

COMPACT BRAID 78

A low-stretch, 12 strand coated Dyneema® SK78 rope that is strong and easy to splice. It is ideal for control lines, halyards and trapeze lines.




EVOLUTION BREEZE

Evolution Breeze has a multi-filament Polyprop core and a melange style Polyester and Technora® cover. Unlike most braids, the strength comes from the cover so the rope is ideal for endless splices. The melange style of cover is not only for appearance but also balances the load on the cover and gives the rope good abrasion resistance.



EVOLUTION PERFORMANCE

Evolution Performance has a low-stretch Polyester core with hard wearing 16 plait Polyester cover. It is ideal for control lines, sheets & halyards on dinghies and small sailboats.

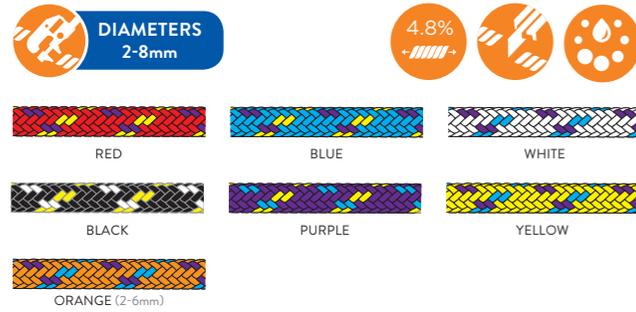

8 PLAIT PRE-STRETCHED POLYESTER

Strong, low-stretch and hard wearing, 8 plait pre-stretched Polyester ropes are ideal for control lines




3 STRAND PRE-STRETCHED POLYESTER

Strong, low-stretch and hard wearing, 3 strand pre-stretched twisted Polyester rope is easy to splice and a good general purpose rope.




EVOLUTION DINGHY LINE

Evolution Dinghy Line has been developed in conjunction with some of the worlds leading Dinghy manufacturers. The 32plait Polyester cover provides good abrasion resistance and excellent performance in cleats. It is ideal for halyards and control lines.

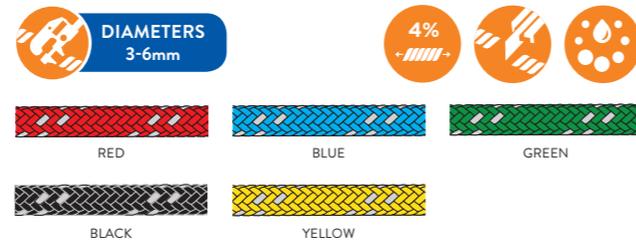

EVOLUTION SPLICE

Evolution Splice is a 12 strand PU coated, low-stretch Polyester single braid that is very easy to splice and is ideal for control lines and tails.

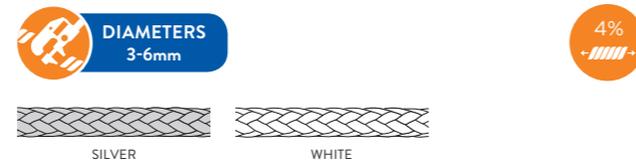

SURFLINE


Surflin is a 100% Dyneema® SK78 braid designed for windsurfing. It is lightweight, has high strength and extremely good abrasion resistance. Surflin is ideal for outhauls.



EVOLUTION X



Evolution X is our new high performance Dinghy sheet, with unique neon cross flecks. Evo X has a 12 strand PU Coated Dyneema® SK75 Core and 16plait cover of Dyneema® and Cordura®. It is flexible, strong, easy to taper and has a high grip cover for excellent handling qualities. As well as single core, there are twin core versions in 7mm and 8mm.

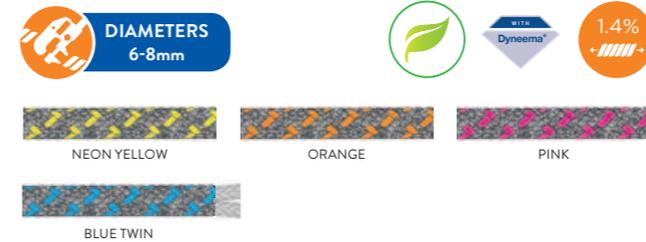

EVOLUTION SHEET


Evolution Sheet has a braided Polyester cover and lightweight braided multi-filament Polypropylene core. This construction gives added abrasion resistance and is still very flexible, lightweight and strong.



EVOLUTION SHEET PLUS



Evolution Sheet Plus is an upgraded version of our Evolution Sheet product. The new cover adds Dyneema® to the polyester to reduce weight and increase abrasion resistance. This new line has been designed for racing dinghy sheets for classes such as the ILCA.

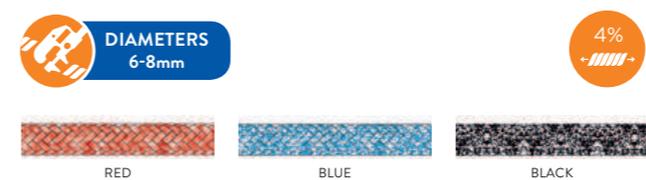


SWIFTCORD

Swiftcord is our premium dinghy sheet rope. This single braid line is produced using Dyneema® SK78 and a special non-slip fibre. Swiftcord is a lightweight, high strength and low-stretch braid that is ideal for sheets, or any line frequently adjusted by hand. Also available as a double braid with a 12 strand Dyneema® SK78 core for tapered sheets.



EVOLUTION TAPER

Evolution Taper is a triple braid construction containing 4mm Evolution Race 78 with an additional Polyester braided cover, it is ideal for tapered spinnaker sheets. We also produce a version made to order with a Technora® cover for added abrasion resistance called Tapertech.

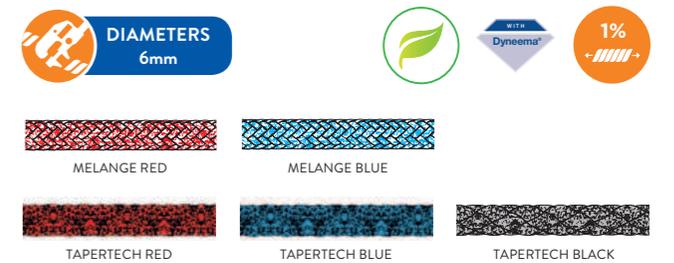

TECHNICAL SPECIFICATION

All our ropes are tested to the limit.

On the water, in many of the world's greatest yacht races, and off the water, at the factory, where ropes are tested to destruction.



We always publish minimum spliced breaking loads as the only loads that are achievable by, and relevant to, the user.

Diameter (mm)	Minimum Spliced Break Loads (kg)					
	Evolution Race 78	Compact Braid 78	Evolution Breeze	Evolution Performance	Evolution Dinghy Line	Evolution Splice
1.5	130	280	-	-	-	-
2	200	435	-	90	-	-
2.5	-	640	-	-	-	-
3	370	900	-	175	180	250
4	820	1500	580	365	375	440
5	1275	2200	850	500	520	720
6	1885	2950	-	800	840	1040
7	-	-	-	-	-	-
8	-	-	-	1300	-	-

Diameter (mm)	8plt Pre Stretched	3 Str Pre Stretched	Swiftcord	Evolution X	Evolution Sheet Plus	Evolution Sheet
3	260	280	-	-	-	-
4	390	590	595	-	-	-
5	545	740	835	-	-	-
6	800	1020	1250	1200	760	620
7	-	1250	1930	1850	1140	840
8	1300	1450	2300	2300	1680	1100
10	-	2100	3600	-	-	-
12	-	2900	-	-	-	-

LOAD-ELONGATION CURVE

Elongation is based on figures taken from tests across the diameter range, to produce an average figure.

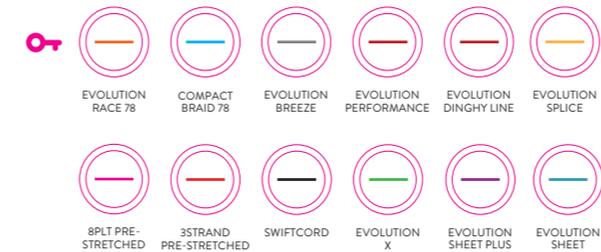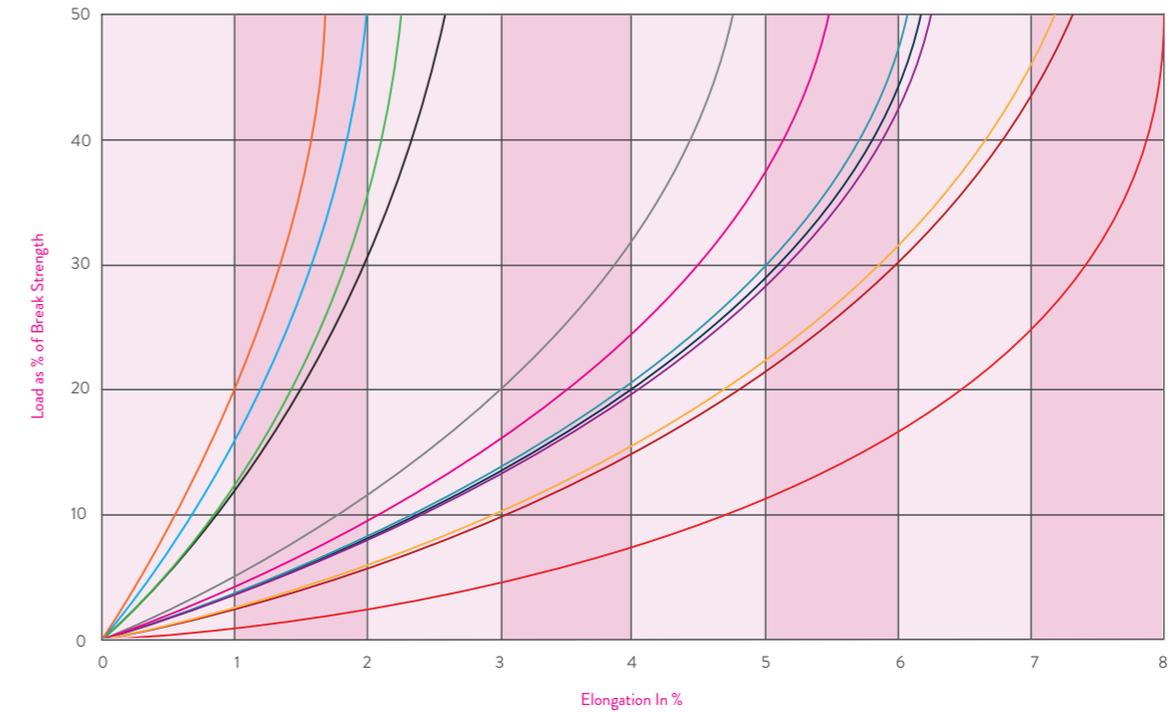

Durability, with the correct degree of elongation and strength are the optimum requirements for mooring and anchoring.

KINGFISHER CAN SUPPLY THE RIGHT ROPE FOR THE JOB FROM A WIDE RANGE OF MATERIALS & CONSTRUCTIONS.

Sales. +44 (0) 1924 497845
Email. sales@dsm-group.co.uk



3 STRAND POLYESTER

3 strand Polyester is soft, strong and is an ideal mooring rope which is also, very easy to splice. All our Polyester ropes are now heat set to give better balance and lower stretch.

 **DIAMETERS**
4-36mm

 6.5%



 WHITE

 NAVY

 BLACK

8 STRAND NYLON

Our white 8 strand Nylon ropes are a single braid manufactured from Nylon. These ropes are strong, flexible, and easy to splice making them excellent for mooring and anchoring.

 **DIAMETERS**
10-24mm

 13%



 WHITE

8 STRAND POLYESTER

Our navy blue and black 8 strand ropes are made from Polyester. These ropes are great for mooring lines and are very easy to splice. White 8 strand Polyester is also available on request.

 **DIAMETERS**
10-24mm

 5%

 NAVY

 BLACK

DOCKLINE

Dockline is an ideal mooring rope. It has a braided Nylon core, providing strength and stretch, and a hardwearing braided Polyester cover.

 **DIAMETERS**
12-24mm

 10%



 NAVY

 BLACK

DOCKLINE PROFESSIONAL

Our Dockline Professional products have a Polyester braided core and a Polyester cover. This rope has been specially designed for today's modern luxury Super Yachts and is available to order in many custom colours. We also supply this product with pre-spliced eyes with, or without, leather or PTC protection.

 **DIAMETERS**
12-40mm

 8%



 NAVY

 BLACK

 SILVER

 DARK GREY

 BURGUNDY

 WHITE

ENVIROLINE DOCKLINE

Our latest addition to the Eco Cycle product range is Enviro-line Dockline; a braid on braid mooring rope produced from recycled plastic bottles. We have tested many rPET fibres in the last few years and we are delighted to have this new line now available. rPET fibres have greater elongation (stretch) than standard Polyester fibres making a mooring rope the ideal product to develop.

 **DIAMETERS**
12-16mm



 9%

 BLACK

 SILVER

3 STRAND MULTI-FILAMENT POLYPROP

3 strand multi-filament Polyprop is a light floating rope that is strong and easy to splice.

DIAMETERS 8-16mm **7%**

NAVY BLACK YELLOW/GREEN/RED*
RED/WHITE/BLUE* RED/BLACK/BLUE*

*Tri colours available in 8mm and 14mm only.

3 STRAND NYLON

3 strand twisted Nylon is very strong, and easy to splice. The construction and material make 3 strand Nylon an excellent mooring and anchoring rope.

DIAMETERS 6-36mm **13%**

WHITE

3 STRAND STAPLE POLYPROP

3 strand staple Polyprop is a hard wearing, twisted rope that floats and is ideal for many general purpose applications.

DIAMETERS 6-32mm **7.5%**

WHITE

3 STRAND HEMPEX

3 strand hempex rope is ideal for traditional boats, decking and garden ropes.

DIAMETERS 6-48mm **5%**

CLASSIC

3 STRAND POLYESTER CLASSIC

3 Strand Polyester classic, is produced using Matt Polyester yarns this makes the product feel very traditional. This rope is easy to splice and is very soft and strong and is ideal for rigging on classic sailing yachts.

DIAMETERS 4-18mm **9%**



CLASSIC

TECHNICAL SPECIFICATION

Diameter (mm)	Minimum Spliced Break Loads (kg)								
	3 Strand Polyester	8 Strand Nylon	8 Strand Polyester	Dockline	Dockline Pro	3 Strand MF PP	3 Strand Nylon	3 Strand Hempex	3 Strand Staple PP
4	300	-	-	-	-	-	-	200	-
6	650	-	-	-	-	-	900	360	600
8	1150	-	-	-	-	1160	1480	600	1060
10	1850	2080	1700	-	-	1750	2300	900	1560
12	3000	3800	2700	3500	3600	2470	4000	1340	2210
14	3400	4800	3700	5500	4500	3290	5000	1740	3050
16	5000	5900	4700	6700	6000	4210	6000	2180	3770
18	6400	6800	6300	8000	8600	-	7500	2730	4810
20	8400	8400	8000	10,000	9500	-	9200	3420	5800
24	11,500	12,400	11,000	12,000	13,000	-	12,600	4830	8100
32	20,000	-	-	-	22,000	-	21,000	8300	-
36	25,200	-	-	-	29,000	-	26,500	10,400	-
48	-	-	-	-	-	-	-	16,000	-

LOAD-ELONGATION CURVE

Elongation is based on figures taken from tests across the diameter range, to produce an average figure.

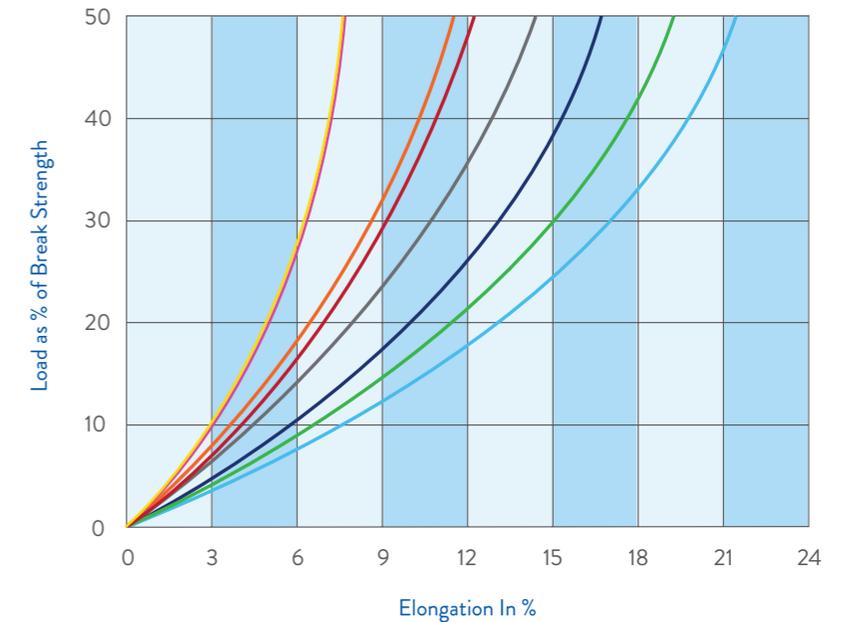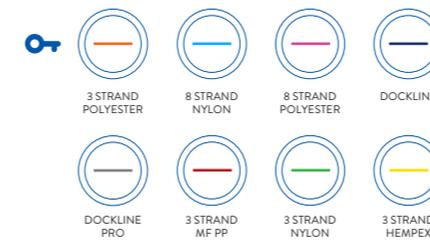

SPLICING EQUIPMENT

SPLICING KITS

Our new splicing kits come in two types the Yacht version and the Dinghy version. Both kits are packed in our Kingfisher reusable splicing bag, ideal for keeping your kit together in one place onboard.

YACHT KIT

- Selma fid set (4 needles)
- Small Swedish Fid
- D 16 Scissors
- Sailmakers Palm
- Pack of 5 Sailmakers Needles
- Roll of Splicing tape
- Spool Whipping twine
- Permanent marker pen



DINGHY KIT

- D Splicer F10 & F15 needles
- 4mm & 5.5mm Selma fid
- D 16 Scissors
- Sailmakers Palm
- Pack of 5 Sailmakers Needles
- Roll of Splicing tape
- Spool Whipping twine
- Permanent marker pen



TWISTED WHIPPING TWINE

Waxed Polyester twisted whipping twine.
White is available in S, M, L, XL and XXL.
Colours available in red, blue, black, green, gold, navy and tan (in size M and L only).



BRAIDED WHIPPING TWINE

Waxed Polyester braided whipping twine. Standard colours: White, Red, Blue, Black, Classic. Neon colours: Yellow, Pink, Orange and Green.



SELMA SPLICING NEEDLES

Full range of Selma splicing needles available in tubes of 4 or 5 needles and also available as individual fids.



D SPLICER

Full range of D Splicer products are available including D Splicer needle sets, fixed D Splicer, Scissors, and Knives.



HAND HELD HEAT KNIFE

HSGM rope cutters, ideal for cutting and sealing synthetic ropes.



SWEDISH FIDS

Classic splicing fids are available in two sizes small (175mm) and large (270mm).



SPLICED ROPES

PRE-SPLICED DOCKLINES

Our premium pre spliced docklines come in an eco friendly reusable mesh bag, reducing the single use plastic. The new docklines also now come with a protective sleeve on the eyes, this together with some tweaks to the construction of the lines has improved the lifespan of our docklines.

DIAMETERS
10-16mm

10%



ANCHOR LINES

Our pre-made anchor lines are available in many diameters in both 30mtr and 50mtr lengths.

DIAMETERS
8-14mm

15%



3 STRAND POLYESTER MOORING LINES

3 strand pre-spliced Polyester mooring lines with approx 30cm eye at one end. Navy, Black and White available in many different lengths and diameters.

DIAMETERS
10-16mm

6.5%



FENDER LINES

3 strand Polyester, 3 strand multi-filament Polyprop and Polyester braid-on-braid pre-spliced fender lines are available in many diameters and lengths.

DIAMETERS
6-10mm



LOOP® PRODUCTS

SHACKLES

LOOP® shackles are made from Compact Braid and are an ideal lightweight, strong rope shackle that will not cause the damage to your boat that a normal metal shackle might. Loop shackles are very easy to open by hand and are now available in both single and double-string constructions.

DOUBLE-STRING CONSTRUCTION



SINGLE STRING CONSTRUCTION



HIGH LOAD SHACKLES

Made from ultra wire product, these shackles are more than 70% stronger than the standard Loop® shackles at the same weight.



LOOP COVER SHACKLES

Our new LOOP® Cover shackles are made from our Dyneema® chafe covers. These shackles are more flexible than the standard rope shackles and are available in 4 diameters



DOG BONES

LOOP® Dog Bones are one of the quickest and easiest ways to connect lines to other lines and/or to hardware. The advantage of a dog bone over a knot or a lashing is that they never bind and are quick and easy to release.



RINGS

The LOOP® rings are strong, maintenance free and made of hard anodised aluminium. They are used to deflect sheets or control lines and for lashings.



BLOCKS

LOOP® blocks are compact and lightweight multipurpose snatch blocks fastened with a loop shackle. The short LOOP® minimises damage to the deck, hull or superstructure. The blocks are available with plain bearings or ball bearings.



CONNECTORS

LOOP® connectors are lightweight shackles with a hard anodised alloy thimble. They can be spliced into outhauls, sheets and halyards to replace standard shackles.



TITANIUM THIMBLES

The new Titanium Thimbles are stronger than our standard Aluminium versions and are ideal for use when higher loadings are required.



THIMBLES

LOOP® thimbles are simple thimbles that can be spliced into control lines. They are used to deflect sheets or control lines and for lashings. The thimbles are made from high strength alloy.



LOOP® PRODUCTS



THE FULL LOOP® PRODUCT RANGE IS AVAILABLE THROUGH KINGFISHER YACHT ROPES. PLEASE CONTACT US FOR THE FULL BROCHURE.

EXTRAS

MINI SPOOLS

Mini spools are available in many different colours in packs of 10.



SAILMAKERS EQUIPMENT

William Smith & Sons sailmakers equipment.



TOESTRAP WEBBING

50mm Polyester webbing with a break of 3200kg. Available in blue, black and red.



JACKSTAY WEBBING

25mm Polyester webbing with a break of 3000kg. Available in blue, black, white and red.



BARRIER ROPE AND FITTINGS

We offer a full range of decorative fittings for 24mm rope in brass and chrome. Also available is a 24mm 3 strand barrier rope which is made from a special soft-textured spun Polyprop in black, burgundy, red and blue.



SHOCKCORD HOOKS



SHOCKCORD BALLS



MOUSE LINES

Mouse lines are 100mtrs 3mm braid available in red, blue, yellow, black and white.



GUARDRAIL NETTING

1mtr wide white 50mm mesh netting.

BUOYANCY BAG WEBBING

30mm white Polyester webbing.

SPIRAL WIRE HOOKS

Black plastic coated spiral hooks



QUICK CLIP SAILTIES



ROPE THIMBLES

Thimbles for splicing hard eyes in rope. Many sizes available to order in stainless, galvanised and nylon.




TARRED MARLIN TWINE

Available in 250grm spools in 1mm, 2.5mm and 3mm diameter.



HOOK AND LOOP SAILTIES



BALL SAILTIES




PROP BAGS

Premium high visibility prop bags made in 5 different sizes.



POCKET NETS

Small and large pocket nets available.



STAINLESS LUGGAGE ELASTICS



LUGGAGE ELASTICS 8MM DIAMETER



WEBBING STRAPS

Many combinations of webbing straps and lifting slings can be manufactured to order. All the webbing straps below are made with high quality Polyester webbings.

25MM CAM STRAPS



25MM MINI LOAD STRAPS WITH CLAWS

Available in stainless steel and standard galvanised versions.



50MM LIGHTWEIGHT LOAD STRAPS WITH CLAWS



50MM HEAVY DUTY LOAD STRAPS WITH CLAWS



25MM ENDLESS MINI LOAD STRAPS



50MM WINCH STRAPS



SCAN HERE

CREATED BY DSM TO BE MORE SOCIALLY RESPONSIBLE FOR OUR WORLD

We have created "Eco-Cycle," which is our internal project name for all improvements and ideas relating to the environment. We have formed an internal focus group to regularly discuss possible improvements and we welcome any ideas from both employees and customers.

The goal of the focus group is to help DSM become carbon neutral and protect the environment we live in, on both a local and international level.

Some of our developments and upcoming projects can be viewed via the QR code.



KINGFISHER OFFER A COMPLETE RANGE OF ROPES DEVELOPED FOR SOME OF THE WORLD'S MOST EXCLUSIVE SUPERYACHTS.

We can supply ropes from all materials, such as Polyester or Dyneema® for bespoke mooring lines with protected spliced eyes; specialised lines for sheets and halyards and lines for every other use on these unique vessels.



SCAN HERE



A FAMILY BUSINESS BIG
ENOUGH TO SERVE, YET
SMALL ENOUGH TO CARE.

CONTACT

T. 01924 497845

E. sales@dsm-group.co.uk

Riverside Works . Huddersfield Road .
Mirfield . West Yorks . WF14 9DL

FOLLOW US ON SOCIAL



[/kingfisher_ropes](https://www.instagram.com/kingfisher_ropes)



[/yachtropes](https://www.facebook.com/yachtropes)



Tylaska
MARINE HARDWARE

SELMA

LOOP
PRODUCTS

D-SPLICER
ROPE SPLICING PRODUCTS